BULLION TL-30



Special Features: 2 hour, 350°F factory fire rating.

Body & Door: Multi-layered structure that combines outer and inner steel plates enclosing a monolithic casting of specialized concrete mixed with ISM's unique anti-penetration composite material. The door is reinforced with ISM's patented anti-penetration alloy grid, providing high protection against concentrated attacks with mechanical and electrical tools.

Bolts & Locking Mechanisms: Three-way active boltwork. Double-action locking mechanism. Glass plate relocking protection on all locks.

Locks: Two UL approved locks. Mechanical or digital combination lock and a high security key lock.

Interior Fitting: Adjustable removable shelves. A hole for an alarm system connection - optional.



BULLION TL-30

Multi Layered Structure

U.L. APPROVED TL-30

Glass Plate Relocking Protection

×

High protection against concentrated attacks with mechanical and electrical tools.

Reinforced Bolt Cylinders

| Model | Inside Dimensions | | | Outside Dimensions | | | Volume | Weight* | Door Swing | | | Shelves |
|----------|-------------------|----|----|--------------------|-------|-------|--------|---------|------------|----|------|---------|
| | Н | W | D | Н | W | D | CuFt | Lbs | А | В | C | Sherves |
| BU251816 | 25 | 18 | 16 | 31.25 | 24.25 | 27.25 | 4.2 | 1230 | 18 | 50 | 44.5 | 1 |
| BU352120 | 35 | 21 | 20 | 41.25 | 27.25 | 31.25 | 8.5 | 1820 | 21 | 57 | 50.5 | 1 |
| BU352420 | 35 | 24 | 20 | 41.25 | 30.25 | 31.25 | 9.7 | 1940 | 24 | 60 | 56.5 | 1 |
| BU452120 | 45 | 21 | 20 | 51.25 | 27.25 | 31.25 | 10.9 | 2160 | 21 | 57 | 50.5 | 2 |
| BU452420 | 45 | 24 | 20 | 51.25 | 30.25 | 31.25 | 12.5 | 2300 | 24 | 60 | 56.5 | 2 |
| BU552120 | 55 | 21 | 20 | 61.25 | 27.25 | 31.25 | 13.4 | 2500 | 21 | 57 | 50.5 | 3 |
| BU552420 | 55 | 24 | 20 | 61.25 | 30.25 | 31.25 | 15.3 | 2660 | 24 | 60 | 56.5 | 3 |
| BU602120 | 60 | 21 | 20 | 66.25 | 27.25 | 31.25 | 14.6 | 2670 | 21 | 57 | 50.5 | 3 |
| BU602124 | 60 | 21 | 24 | 66.25 | 27.25 | 35.25 | 17.5 | 2910 | 21 | 61 | 50.5 | 3 |
| BU652818 | 65 | 28 | 18 | 71.25 | 34.25 | 29.25 | 19.0 | 3270 | 28 | 62 | 64.5 | 4 |
| BU723626 | 72 | 36 | 26 | 78.25 | 42.25 | 37.25 | 39.0 | 4710 | 36 | 78 | 80.5 | 4 |

(â)

4-Way Bolts Engagement Special Alloy Grid

耕

Double Locking

Protection

۰


* Weight Tolerance - 5%.

** Dimensions Tolerance - ±0.5".

*** Add 2" to outside depth for 3-Spokes Operating Handle.


**** Add 3.55" to outside depth for Pull-Handle.





Add Ons:

- Left Swing Optinal No charge
- Preparation (only) for movement time-lock No charge By Request
- Custome interior secured compartments By Request
- Additional shelves By Request

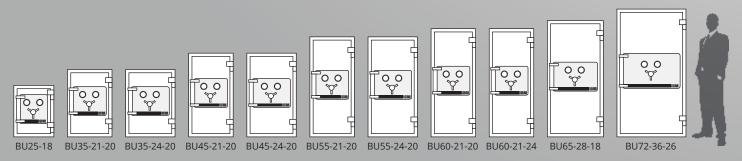

ISM safes USA Inc 1881 Route 46 Ledgewood, NJ 07852 www.ismsafes-usa.com



