



Special Features: TL15x6 protection burglary resistant ,tested by the manufacture and 2 hours 350 F factory fire rating.

DOOR & BODY: manufacturer with two inter welded walls with reinforcement filled with Strong heavy concrete in a total thickness of 2.75 inch protection material for body and a total of 5.5 inch for the door.

Bolts & locking mechanism: three -bolts 1.5 inc diameter with a three way active boltwork protected by a glass plate reloading protection against locks drilling.

Locks: Fitted with 2 high security locks- a double bit Mauer key lock 71111+Electronic lock Euro ECBS approved

DEFENDER

ISM -Factory Rating TL-15x6 & 2 hours 350 Fr

protection against concentrated attacks with mechanical and electrical tools.
The same high quality construction safes at an affordable price.




Model	Inside Sizes			Outside Sizes			Volume	Weight*	Shelves
	H	W	D	H	W	D	CuFt	Lbs	
DEF50	14	14	11	19.68	19.68	19.68	1.30	473	1
DEF65	20	14	11	25.50	19.68	19.68	1.83	579	1
DEF80	25	18	13	31.49	23.62	21.65	3.60	825	1
DEF100	33	18	13	39.37	23.62	21.65	4.69	1001	1
DEF130	45	18	15	51.18	23.62	23.62	7.27	1280	3
DEF160	61	22	15	62.99	27.55	23.62	11.93	1782	3
DEF180	65	22	19	70.86	27.55	27.55	15.96	2162	3

* Weight Tolerance + - 5%.

** Dimensions Tolerance - ± 0.2 ".

*** Add 2" to outside depth for Operating Handle.

Colors:




RAL 7016

Add Ons:

Interior fitting: adjustable removeable shelves

4 anchoring holes in the bottom +4 anchoring holes at the back

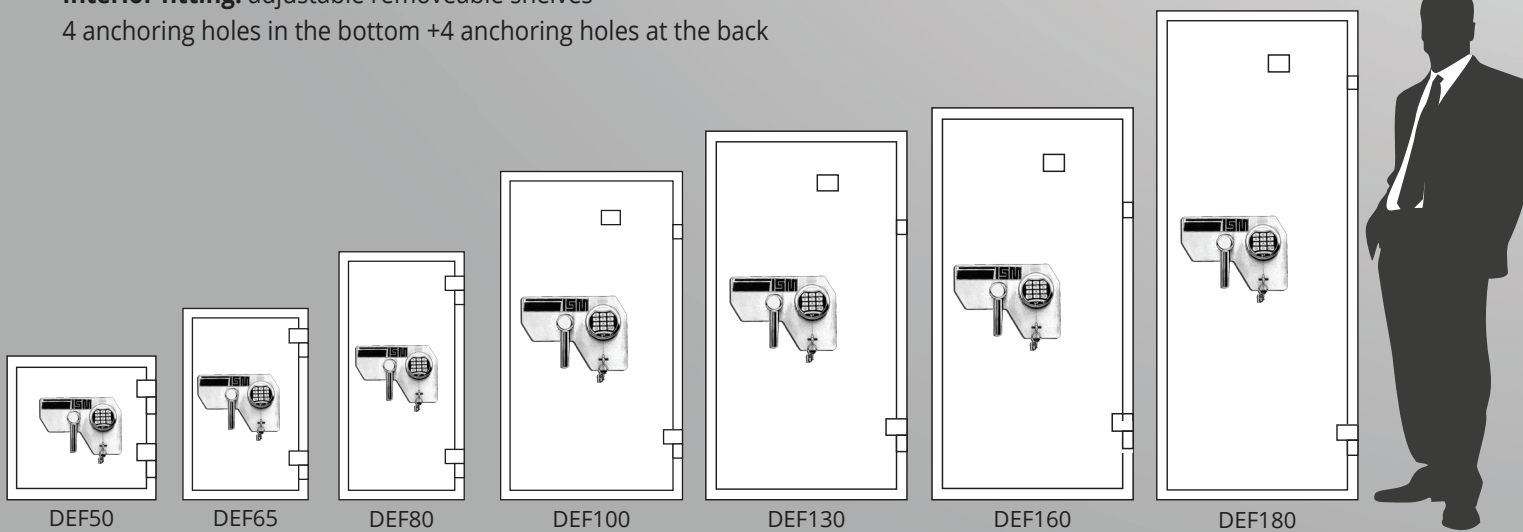

ISM

SINCE 1914